

CHAPTER 17: CORROSION AND DEGRADATION

ISSUES TO ADDRESS...

- Why does corrosion occur?
- What metals are most likely to corrode?
- How do temperature and environment affect corrosion rate?
- How do we suppress corrosion?



THE COST OF CORROSION

- **Corrosion:**

- the destructive electrochemical attack of a material.

- Al Capone's ship, Sapona, off the coast of Bimini.



Photos courtesy L.M. Maestas, Sandia National Labs. Used with permission.

- **Cost:**

- 4 to 5% of the Gross National Product (GNP)*


- this amounts to just over \$400 billion/yr**

* H.H. Uhlig and W.R. Revie, *Corrosion and Corrosion Control: An Introduction to Corrosion Science and Engineering*, 3rd ed., John Wiley and Sons, Inc., 1985.

**Economic Report of the President (1998).

CORROSION OF ZINC IN ACID


- Two reactions are necessary:

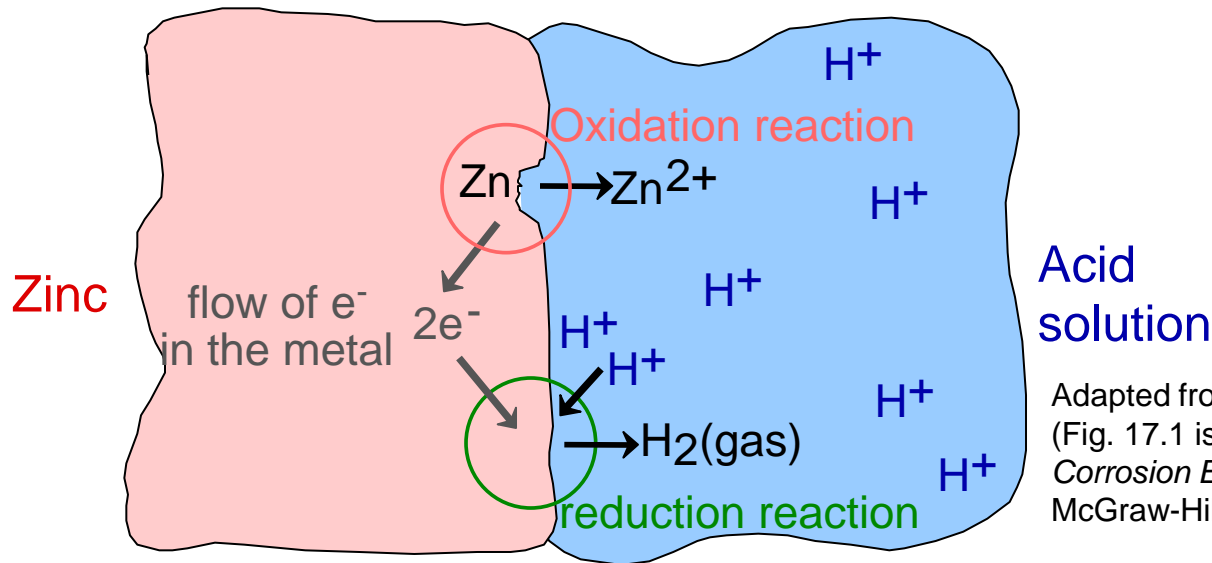


Adapted from Fig. 17.1, *Callister 7e*.
(Fig. 17.1 is from M.G. Fontana,
Corrosion Engineering, 3rd ed.,
McGraw-Hill Book Company, 1986.)

- Other reduction reactions:

-- in an acid solution




-- in a neutral or base solution




STANDARD HYDROGEN (EMF) TEST

- Two outcomes:

--Metal sample mass ↓

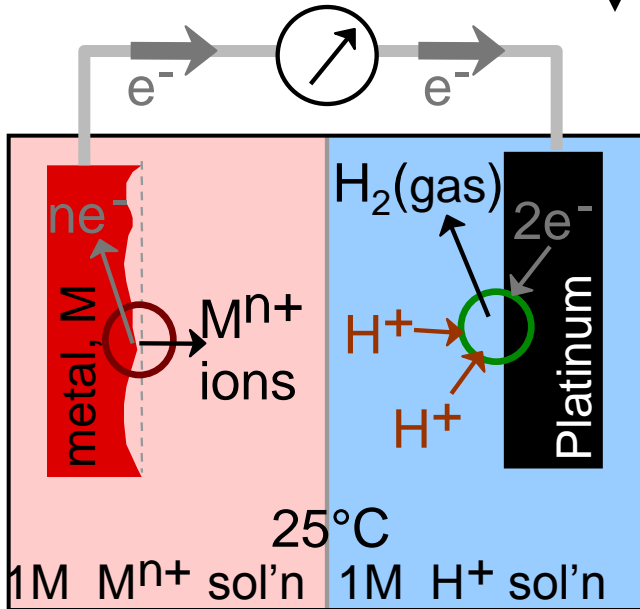

--Metal sample mass ↑

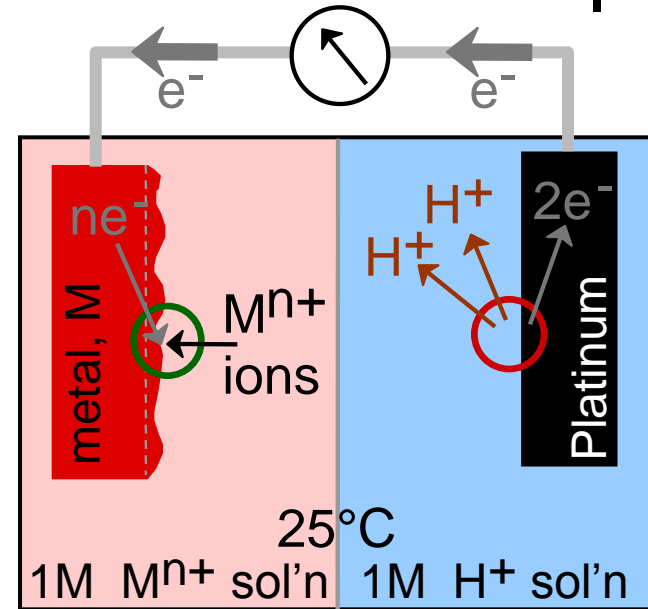

--Metal is the anode (-)

--Metal is the cathode (+)

$$V_{\text{metal}}^{\circ} < 0 \quad (\text{relative to Pt})$$

$$V_{\text{metal}}^{\circ} > 0 \quad (\text{relative to Pt})$$

Standard Electrode Potential

Adapted from Fig. 17.2, Callister 7e.



STANDARD EMF SERIES

- EMF series


metal	V_{metal}°
Au	+1.420 V
Cu	+0.340
Pb	- 0.126
Sn	- 0.136
Ni	- 0.250
Co	- 0.277
Cd	- 0.403
Fe	- 0.440
Cr	- 0.744
Zn	- 0.763
Al	- 1.662
Mg	- 2.363
Na	- 2.714
K	- 2.924

more cathodic ↑

more anodic ↓

$\Delta V^{\circ} = 0.153\text{V}$

- Metal with smaller V_{metal}° corrodes.
- Ex: Cd-Ni cell

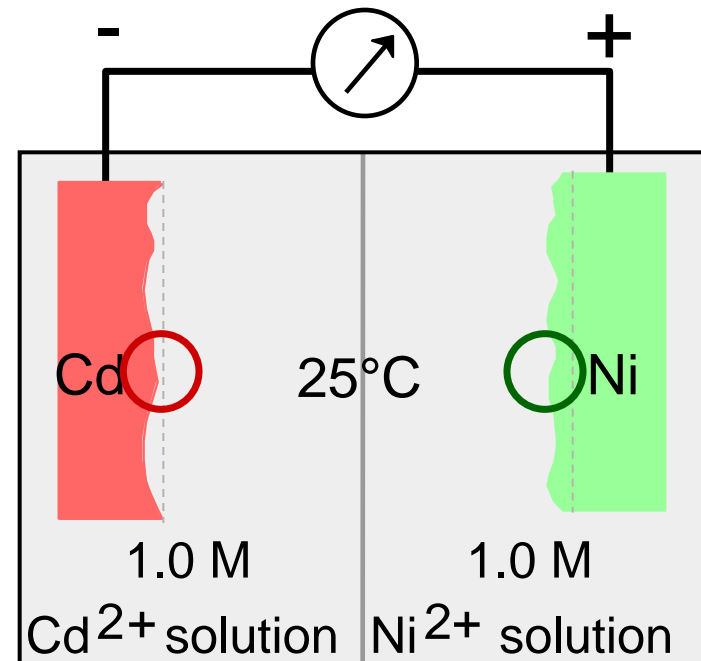


Data based on Table 17.1, Callister 7e.

Adapted from Fig. 17.2, Callister 7e.




CORROSION IN A GRAPEFRUIT

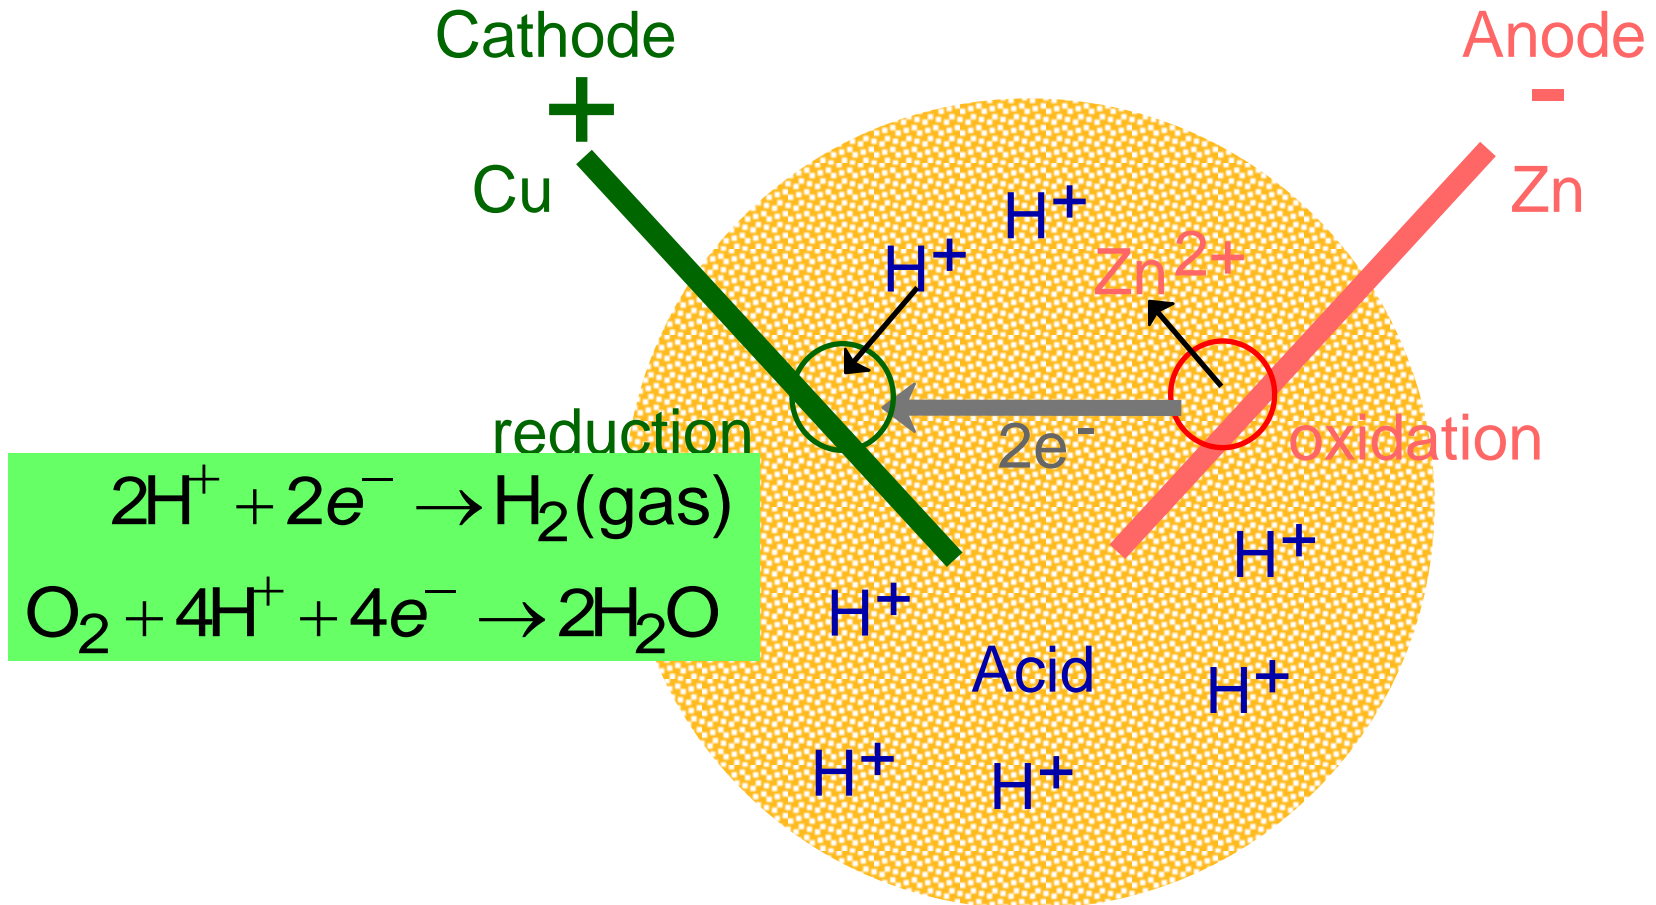

EFFECT OF SOLUTION CONCENTRATION


- Ex: Cd-Ni cell with standard 1 M solutions

$$V_{\text{Ni}}^{\circ} - V_{\text{Cd}}^{\circ} = 0.153$$

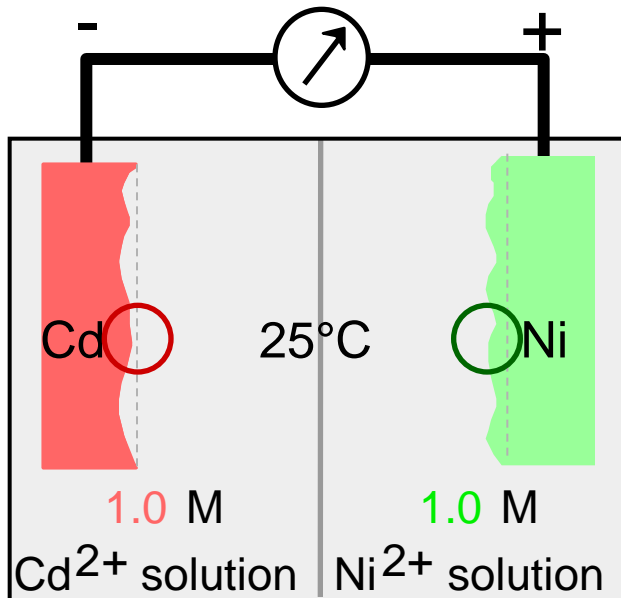

- Ex: Cd-Ni cell with non-standard solutions

$$V_{\text{Ni}} - V_{\text{Cd}} = V_{\text{Ni}}^{\circ} - V_{\text{Cd}}^{\circ} - \frac{RT}{nF} \ln \frac{X}{Y}$$

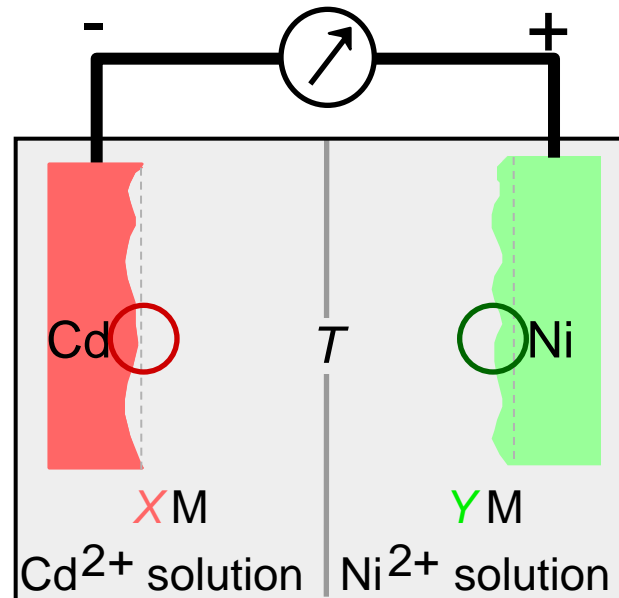


$n = \#e^-$
 per unit
 oxid/red
 reaction
 (= 2 here)
 $F =$
 Faraday's
 constant
 = 96,500
 C/mol.

- Reduce $V_{\text{Ni}} - V_{\text{Cd}}$ by
 - increasing X
 - decreasing Y



GALVANIC SERIES

- Ranks the reactivity of metals/alloys in seawater

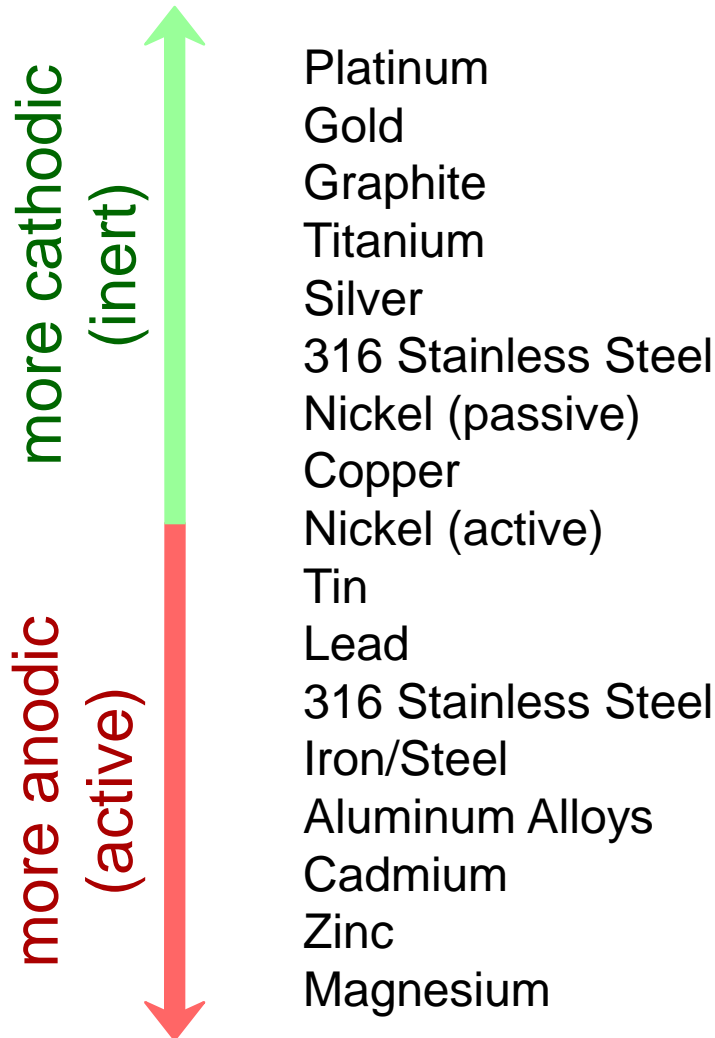

Based on Table 17.2, *Callister 7e*. (Source of Table 17.2 is M.G. Fontana, *Corrosion Engineering*, 3rd ed., McGraw-Hill Book Company, 1986.)



FORMS OF CORROSION

- **Uniform Attack**

Oxidation & reduction occur uniformly over surface.

- **Selective Leaching**

Preferred corrosion of one element/constituent (e.g., Zn from brass (Cu-Zn)).

- **Intergranular**

Corrosion along grain boundaries, often where special phases exist.


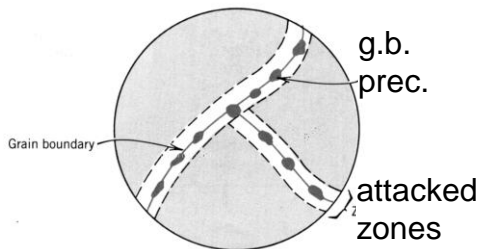


Fig. 17.18, Callister 7e.

- **Stress corrosion**

Stress & corrosion work together at crack tips.

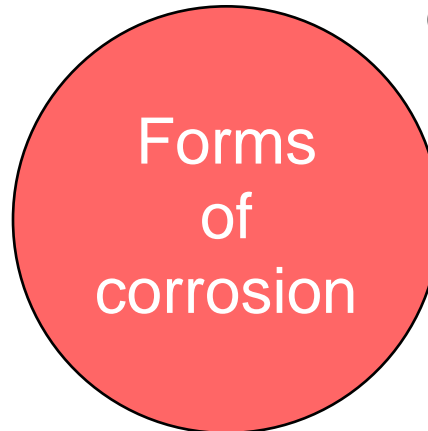

- **Galvanic**

Dissimilar metals are physically joined. The more anodic one corrodes. (see Table 17.2) Zn & Mg very anodic.

- **Erosion-corrosion**

Break down of passivating layer by erosion (pipe elbows).

- **Pitting**

Downward propagation of small pits & holes.




Fig. 17.17, Callister 7e. (Fig. 17.17 from M.G. Fontana, *Corrosion Engineering*, 3rd ed., McGraw-Hill Book Company, 1986.)

- **Crevice** Between two pieces of the same metal.




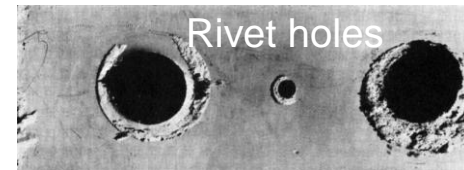


Fig. 17.15, Callister 7e. (Fig. 17.15 is courtesy LaQue Center for Corrosion Technology, Inc.)

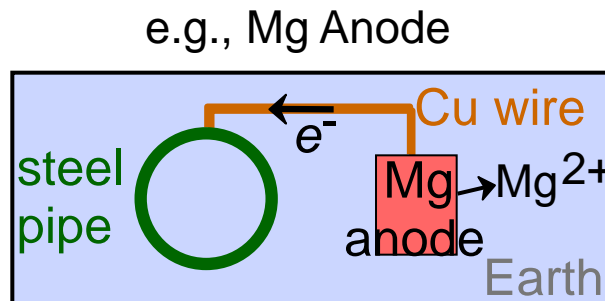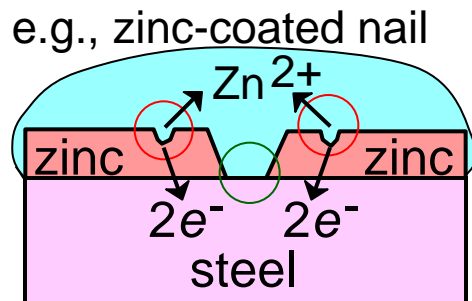

CONTROLLING CORROSION

- Self-protecting metals!
 - Metal ions combine with O to form a thin, adhering oxide layer that slows corrosion.
- Reduce T (slows kinetics of oxidation and reduction)
- Add inhibitors
 - Slow oxidation/reduction reactions by removing reactants (e.g., remove O_2 gas by reacting it w/an inhibitor).
 - Slow oxidation reaction by attaching species to the surface (e.g., paint it!).
- Cathodic (or sacrificial) protection
 - Attach a more anodic material to the one to be protected.

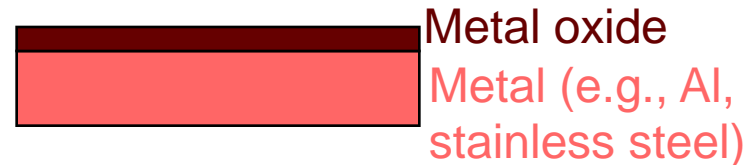

Adapted from Fig. 17.23, Callister 7e.

Adapted from Fig. 17.22(a), Callister 7e. (Fig. 17.22(a) is from M.G. Fontana, *Corrosion Engineering*, 3rd ed., McGraw-Hill Book Co., 1986.)



SUMMARY

- Corrosion occurs due to:
 - the natural tendency of metals to give up electrons.
 - electrons are given up by an **oxidation** reaction.
 - these electrons then used in a **reduction** reaction.
- Metals with a more negative **Standard Electrode Potential** are more likely to corrode relative to other metals.
- The **Galvanic Series** ranks the reactivity of metals in seawater.
- Increasing T speeds up oxidation/reduction reactions.
- Corrosion may be controlled by:
 - using metals which form a protective oxide layer
 - adding inhibitors
 - painting
 - reducing T
 - using cathodic protection.



ANNOUNCEMENTS

Reading:

Core Problems:

Self-help Problems:

